



MIGHTY SYNERGY INDUSTRIES SDN BHD

309775-h

No. 16, Lorong Industri 15, Taman Bukit Panchor, 14300 Nibong Tebal, Penang, Malaysia.

Tel : +604-593 1818 Fax : +604-593 1919

Email : msi@msi.com.my Website : www.msi.com.my



ILITE AR RECESSED FITTING

FEATURES & BENEFIT

- * Designed for recessed-mounting on suspended tee-bar ceiling.
- * High specification aluminium mirror reflectors are optically efficient, even light distribution and glare control

APPLICATION

- * Suitable as general lighting in both industrial and domestic application.
- * School, corridors, walkaway, lift lobby and staircase.

PRODUCT DESCRIPTION

HOUSING MATERIAL	: COLD ROLLED STEEL
COATING	: WHITE EPOXY POWDER
RATE INPUT VOLT & FREQ	: 220-240V, 50/60 HZ
POWER FACTOR	: 0.5 / 0.9
THD	: ≤20%
IP RATING	: IP20
CCT	: 3000K / 4000K / 6500K
LIFE SPAN	: 15,000 / 30,000 / 50,000 HOURS


ORDER INFORMATION

ORDERING CODE		DIMENSION (in mm) ± 1.5mm							
MODEL	RATING	A		B		C		D	
		IMPERIAL	METRIC	IMPERIAL	METRIC	IMPERIAL	METRIC	IMPERIAL	METRIC
E22-220 AR	2 X 20W	603	595	70	78	610	610	600	595
E22-320 AR	3 X 20W	603	595	70	78	610	610	600	595
E22-420 AR	4 X 20W	603	595	70	78	610	610	600	595
E24-240 AR	2 X 40W	603	595	70	78	1220	1220	1212	1195
E24-340 AR	3 X 40W	603	595	70	78	1220	1220	1212	1195
E24-440 AR	4 X 40W	603	595	70	78	1220	1220	1212	1195


OPTIONAL CONTROL GEAR / COMPONENTS

- EMERGENCY POWER-PACK
- LAMPS

DIMENSION (± 1.5mm)

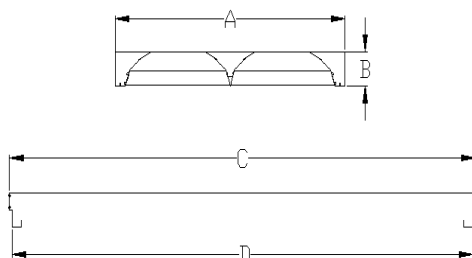

PHOTOMETRIC

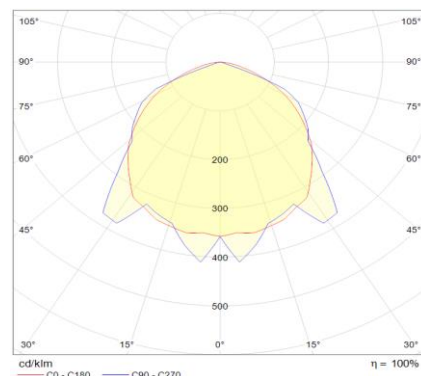

*MSI reserve the right to change and amend the specification without prior notice

*Actual power consumption may vary from supplier's specification subject to power supply voltage etc variations