



MIGHTY SYNERGY INDUSTRIES SDN BHD

309775-h

No. 16, Lorong Industri 15, Taman Bukit Panchor, 14300 Nibong Tebal, Penang, Malaysia.
 Tel : +604-593 1818 Fax : +604-593 1919
 Email : msi@msi.com.my Website : www.msi.com.my



MRM MIRROR RECESSED FITTING

FEATURES & BENEFIT

- * Designed for recessed-mounting on suspended tee-bar ceiling.
- * High specification aluminium mirror reflectors are optically efficient, even light distribution and glare control

APPLICATION

- * Suitable as general lighting in both industrial and domestic application.
- * School, corridors, walkway, office, outlets, supermarkets.


PRODUCT DESCRIPTION

HOUSING MATERIAL	: COLD ROLLED STEEL
COATING	: WHITE EPOXY POWDER
RATE INPUT VOLT & FREQ	: 220-240V, 50/60 HZ
POWER FACTOR	: 0.5 / 0.9
THD	: ≤20%
IP RATING	: IP20
CCT	: 3000K / 4000K / 6500K
LIFE SPAN	: 15,000 / 30,000 / 50,000 HOURS

OPTIONAL CONTROL GEAR / COMPONENTS

EMERGENCY POWER-PACK
LAMPS


DIMENSION (± 1.5mm)

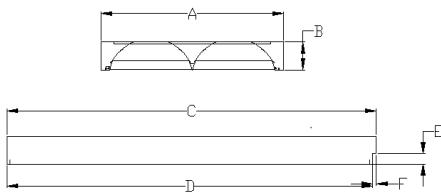

ORDER INFORMATION

ORDERING CODE		DIMENSION (in mm) ± 1.5mm											
MODEL	RATING	A		B		C		D		E		F	
		IMPERIAL	METRIC	IMPERIAL	METRIC	IMPERIAL	METRIC	IMPERIAL	METRIC	IMPERIAL	METRIC	IMPERIAL	METRIC
MRM 12-220 AR	2 X 20W	298	295	90	96	614	614	602	594	35	41	12	20
MRM 14-240 AR	2 X 40W	298	295	90	96	1224	1224	1212	1194	35	41	12	30
MRM22-220 AR	2 X 20W	603	595	90	96	614	614	602	594	35	41	12	20
MRM22-320 AR	3 X 20W	603	595	90	96	614	614	602	594	35	41	12	20
MRM22-420 AR	4 X 20W	603	595	90	96	614	614	602	594	35	41	12	20
MRM24-240 AR	2 X 40W	603	595	90	96	1224	1224	1212	1194	35	41	12	30
MRM24-340 AR	3 X 40W	603	595	90	96	1224	1224	1212	1194	35	41	12	30
MRM24-440 AR	4 X 40W	603	595	90	96	1224	1224	1212	1194	35	41	12	30

PHOTOMETRIC

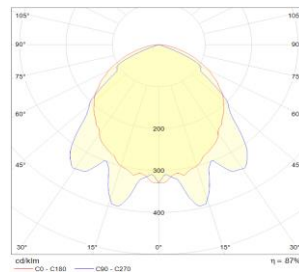

*MSI reserve the right to change and amend the specification without prior notice

*Actual power consumption may vary from supplier's specification subject to power supply voltage etc variations