



MIGHTY SYNERGY INDUSTRIES SDN BHD

309775-h

No. 16, Lorong Industri 15, Taman Bukit Panchor, 14300 Nibong Tebal, Penang, Malaysia.
 Tel : +604-593 1818 Fax : +604-593 1919
 Email : msi@msi.com.my Website : www.msi.com.my



MTD LED TEARDROP FITTING

FEATURES & BENEFIT

- * Basic led lighting with minimum number of components for low maintenance and easy installation.
- * For use in area where directional control of illumination is minimal.

APPLICATION

- * Suitable as general lighting in both industrial and domestic application.
- * School, corridors, walkaway, lift lobby and staircase.

PRODUCT DESCRIPTION

HOUSING MATERIAL	: ALUMINIUM EXTRUSION PROFILE
COATING	: ANODIZED TREATMENT
RATE INPUT VOLT & FREQ	: 220-240V, 50/60 HZ
POWER FACTOR	: 0.9
THD	: ≤20%
IP RATING	: IP40
CCT	: 3000K / 4000K / 6500K
LIFE SPAN	: 15,000 / 30,000 / 50,000 HOURS

ORDER INFORMATION

ORDERING CODE		DIMENSION (in mm) ± 1.5mm		
MODEL	RATING	A	B	C
MTD 120	1 X 20W	124	635	50
MTD 140	2 X 40W	124	1235	50


OPTIONAL CONTROL GEAR / COMPONENTS

- EMERGENCY POWER-PACK
- LAMPS


PHOTOMETRIC

DIMENSION (± 1.5mm)

2FT / 4FT

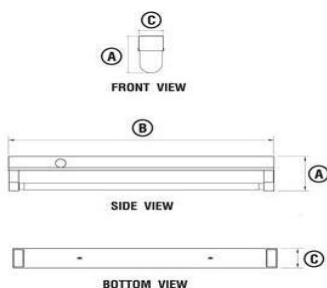

2FT / 4FT

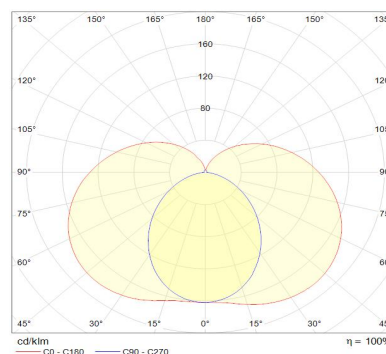

*MSI reserve the right to change and amend the specification without prior notice

*Actual power consumption may vary from supplier's specification subject to power supply voltage etc variations